

B.A.J. system design Ltd

45 A & B Hartlebury Trading Estate, Hartlebury, Nr Kidderminster, Worcestershire, DY10 4JB

Telephone: 01299 250052 Fax: 01299 251153

ARTALU MODULES

Model No	Approx Total Height mt	Height Top Rung mt	Sections Required			Brackets No	Weight kg
			Base m	Int m	Top m		
1	3.30	2.64	2.78	-	0.51	4	14
2	4.70	3.60	2.78	-	1.50	5	20
3	5.20	4.50	2.78	-	2.40	6	24
4	6.30	5.60	2.78	3.0	0.51	7	27
5	7.30	6.60	2.78	3.0	1.50	8	33
6	8.20	7.46	2.78	3.0	2.40	9	37
7	9.30	8.60	2.78	3.0x2	0.51	10	39
8	10.30	9.56	2.78	3.0x2	1.50	11	45

The ARTALU is manufactured from Anodised Aluminium Alloy 6063 with Stainless Steel 18/8 and Nylon Accessories.

Each Ladder is supplied with all Fixing Accessories, 1 Standard Opening Mechansim & Installation Instructions.

ADDITIONAL ELEMENTS:

ADDITIONAL LOCKING MECHANSIM

CONNECTING ROD

REINFORCING CHANNEL - Required when a Ladder projects above a parapet wall

PACKING & DELIVERY : P.O.A

INSTALLATION P.O.A - Prices Quoted are for the Supply Only.

SITE VISITS P.O.A

VAT Standard Rate will be applied to all prices.

PAYMENT TERMS: Please read our standard terms of trading

Prices quoted are not firm and are subject to change without notice. Written quotations will be held for 30 days.



All Goods and/or Services are Supplied subject to our Terms & Conditions of Trading (available on request).

Vat Reg. No. 436 7211 57 Registered in England No. 3409633 Registered Office as above.

ARTALU


B.A.J
System
design Ltd

Units 45 A/B Hartlebury Trading Estate,
Nr Kidderminster, Worcestershire DY10 4JB
Telephone : 01299 250052 Fax : 01299 251153

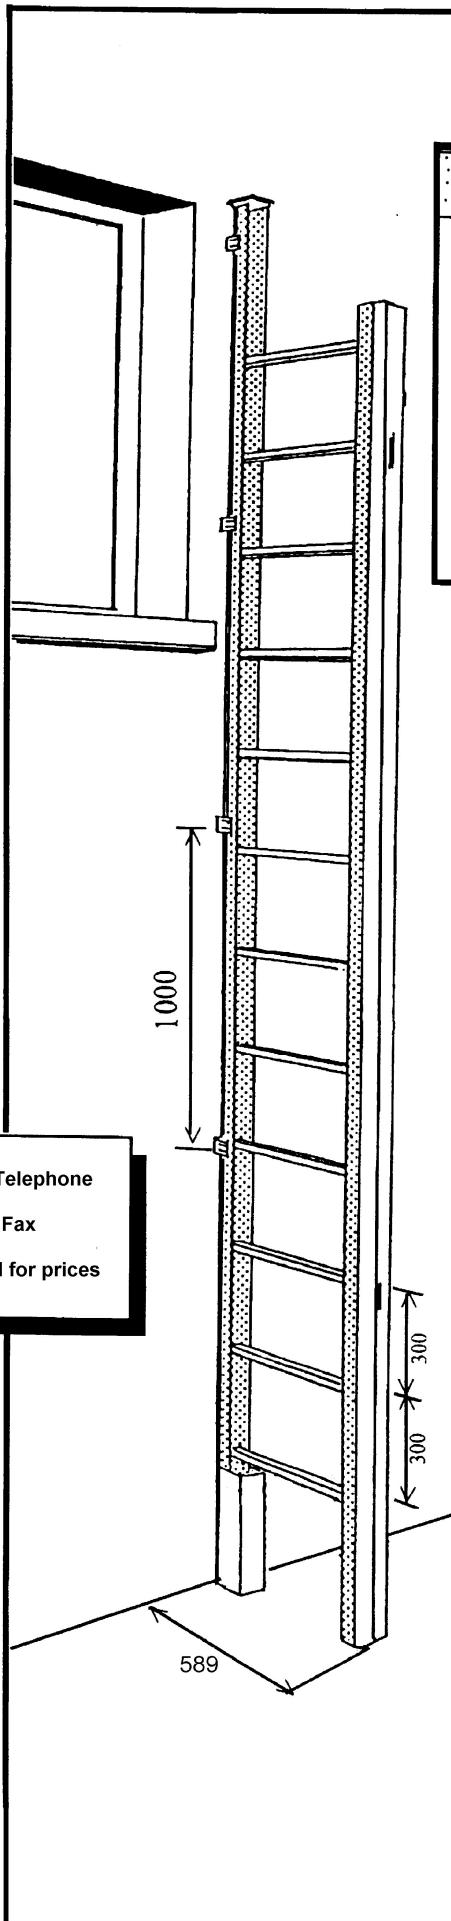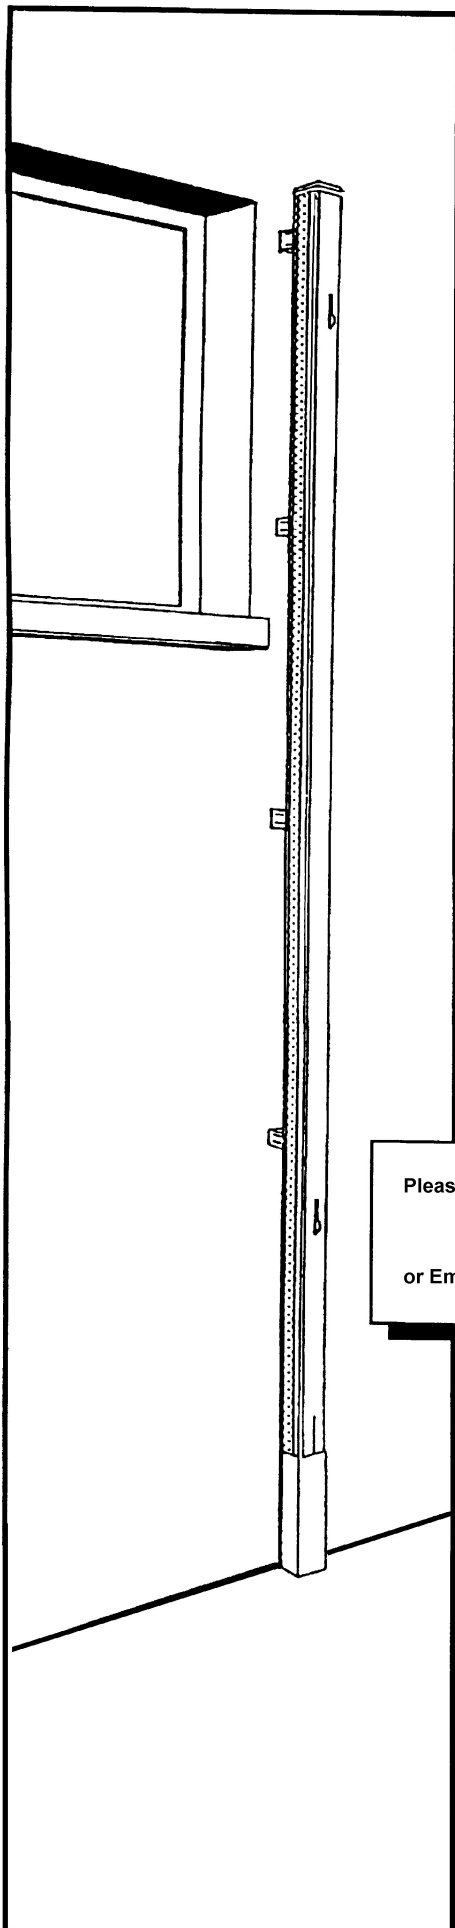

Please Telephone
Fax
or Email for prices

ARTALU - TECHNICAL DATA

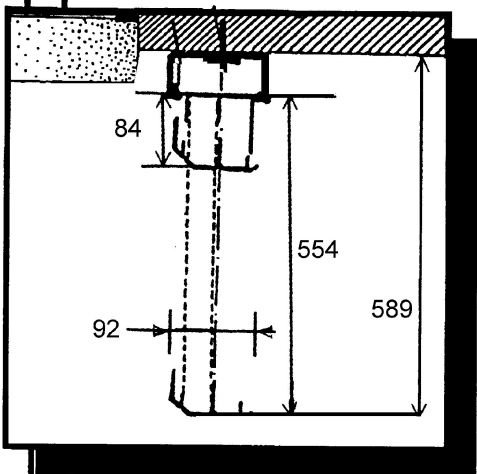

SECTION: 92 x 84 mm
WIDTH OF RUNGS
BETWEEN UPRIGHTS: 448 mm
TOTAL LADDER WIDTH: 554 mm
WIDTH INC. BRACKET: 589 mm
RUNGS SECTION: 36 x 22.5 mm
RUNG SPACING: 300 mm
AUTOMATIC LOCKING MECHANISM
UNFOLDING : manual
FIXING : 1 x wall clip per 1000mm
CLOSING made easier by Stainless Steel springs compensating for the mobile uprights load. Secured by simple catches and locked if required.
STABILISED OPENING POSITION by the mobile upright resting on the floor or by a sliding oblique stiffener located under the bottom rung.
RAW MATERIALS:
- aluminium alloy 6063
- Stainless Steel 18/8 & Nylon
- no special maintenance
RESISTANCE
a) load per single rung : 300kg
b) load at mobile upright : 2500kg
DILATION : the ladder can slide in its own wall clips.
WEIGHT PER METRE (all accessories included) : 4.2kg
EACH LADDER IS SUPPLIED WITH ALL ITS FIXING ACCESSORIES.
LONGER LADDERS CAN BE ASSEMBLED FROM 3M MODULAR ELEMENTS.

All goods are supplied on our Terms and Conditions and NOT those of our Customer.

Payment Terms

Discounts

We require payment in full with all first orders, thereafter Nett Monthly Account (subject to approval).

Trade / Contract discounts are not offered on first orders and are at the discretion of B.A.J at all times

Main Contractors Discounts are not included for and if required should be added by the contractor to the prices specified.

All prices are Nett and do not allow for retentions. Retentions will not be accepted.

Site Visits

Are not included for in our price lists and if required will be charged at £30.00 Lump Sum plus £2.00 per mile, chargeable in advance. This charge will be refunded at a rate of 10% of any contract value up to the total site visit charge. Where an overnight stay is necessary this will be added but will not be refundable.

Delivery & Off Loading

All Deliveries are made by Carrier using a Standard Next Day Service to the address shown on the Customers Order. The Driver is NOT responsible for off-loading the vehicle.

An authorized person must be available at the delivery address to accept the goods and shortages must be reported within 3 days of delivery.

Installation

Goods are normally supplied for installation by others and Unless specified, installation is not included.

All products should be Installed in accordance with the instructions provided and using the appropriate fixings for the supporting structure.

Powder Coating

Where applicable, any finishes other than anodised aluminium are applied on top of the anodised surface and are only applied to the faces which remain visible when not in operation.

Quotations are based upon the information available at the time of quoting and upon the enquirers specifications unless site measurements have been taken by a representative of B.A.J. All quotations are valid for 30 days to order with a further 30 days for completion unless specified otherwise and do not include V.A.T. or any other Taxes.

Liability

We will make every effort to comply with our customers delivery requirements and any defects or shortages will be resolved as soon as possible following a customers report, but we do not accept any liability for consequential costs resulting from such problems.